




MA™ SERIES MODULE MPT™-SO

Transformer Balanced Mic Preamp w/Screw Terminals

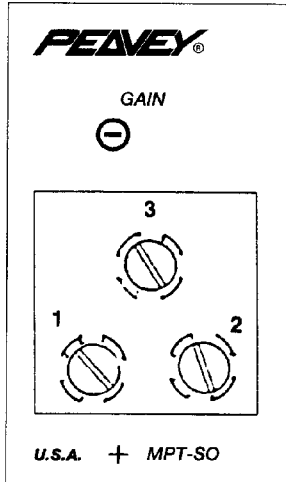


Input sensitivity control, controls input gain of the module.
Varies the overall output level of the module.

Screw terminal input panel, providing transformer balanced input.
Terminal #3 is positive; terminal #2 is negative; and terminal #1 is ground.


INSTALLATION

The module installs at the rear panel of product accepting the standard 6-pin card-edge connection. Align card-edge connector with top and bottom circuit board guides. Snap module into card-edge socket, push flush with rear panel, and install (furnished) mounting screws.

BLOCK DIAGRAM

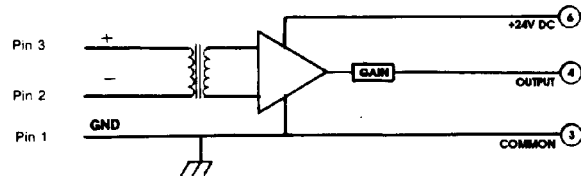


Clip jumper to defeat phantom power.

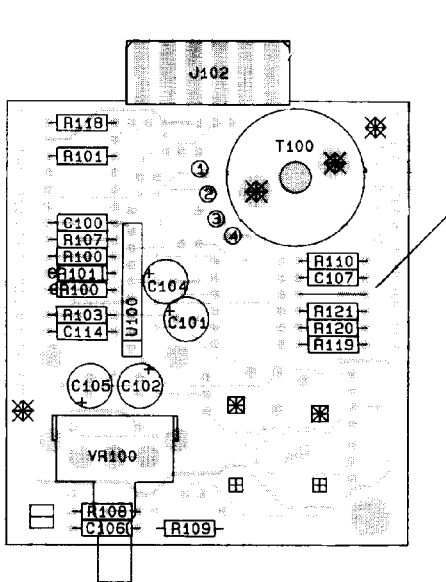

SPECIFICATIONS

Gain:	31 to 51 dB
Input Sensitivity:	0.28 mV to 2.8 mV
Frequency Response:	±1 dB 30 Hz to 20 kHz
EIN: (20 - 20 kHz)	-123 dBu (200 ohms terminated)
Distortion: (1 kHz)	<0.1% with 1 mV input
Source Impedance:	200 ohms
Phantom Power:	24V DC (Defeatable)
Power:	24V DC (13 mA)
Control:	Gain
Mounting:	Edge card connector
Weight:	2.9 oz.
Dimensions:	3.07" H x 1.38" W x 3.46" D
Load Impedance:	10K ohms

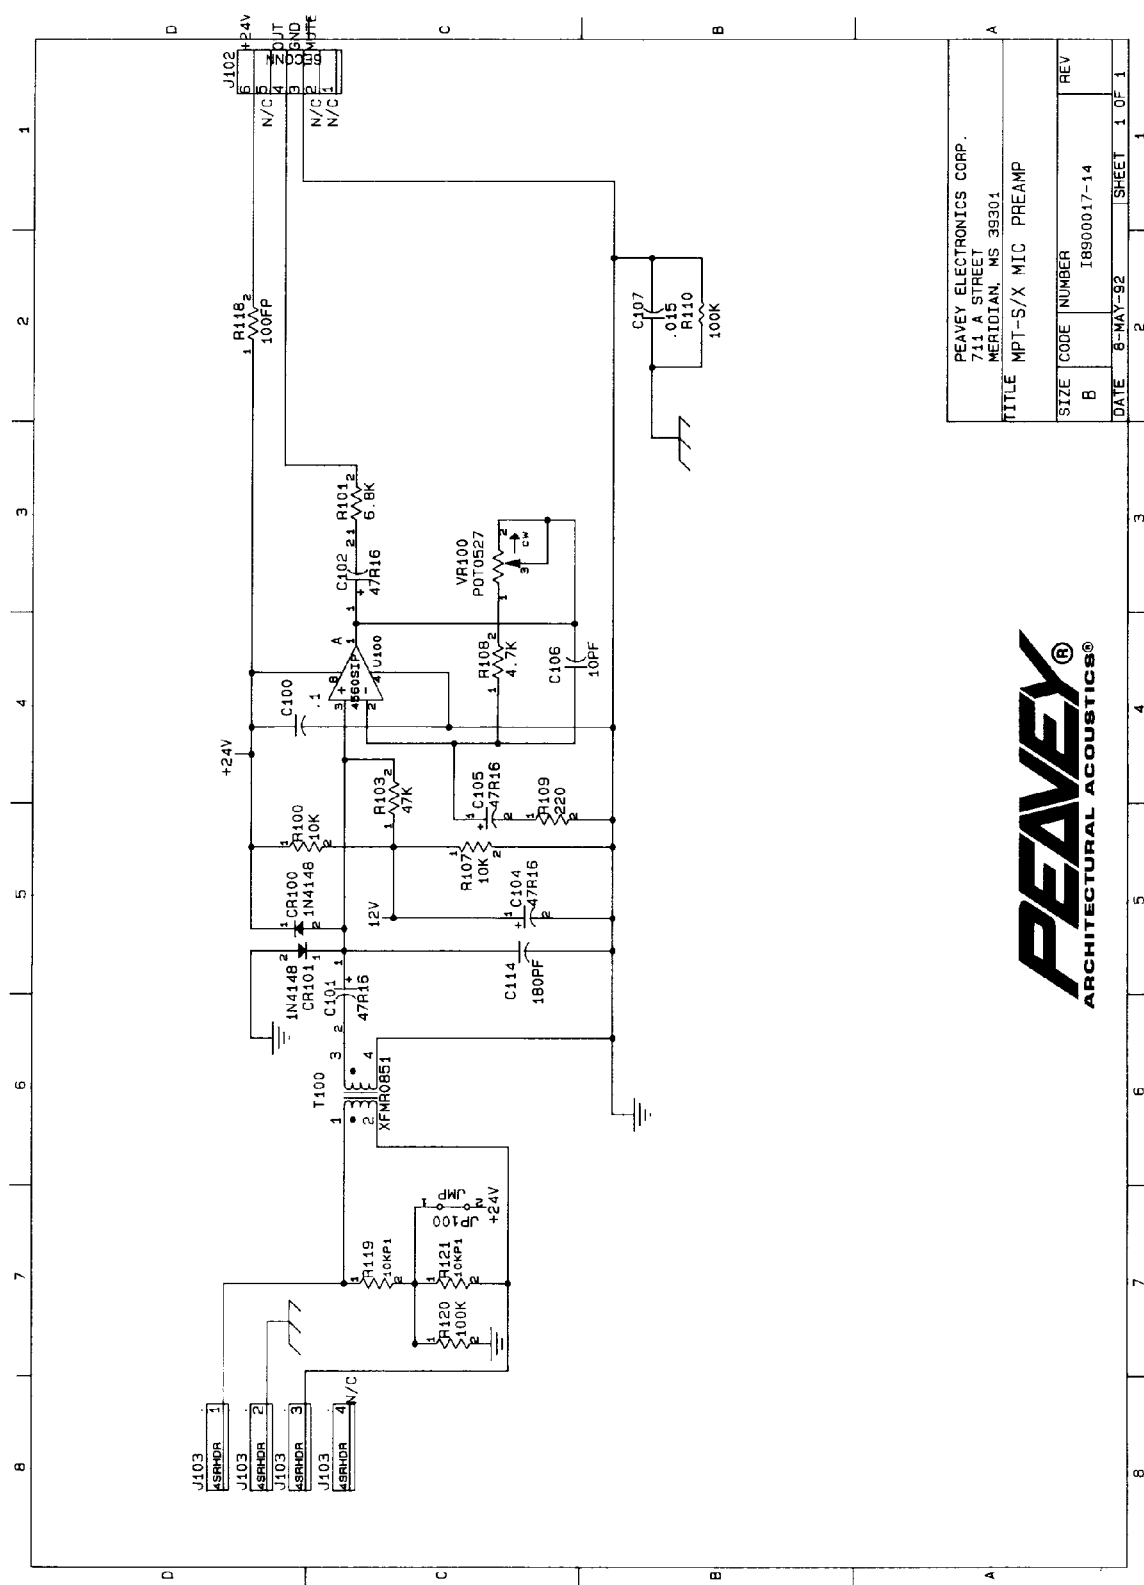

PEAVEY ELECTRONICS CORP. 711 A STREET MERIDIAN, MS 39301	
TITLE MPT-S/X MIC PREAMP	
SIZE	CODE NUMBER
B	I8900017-14
REV	
DATE	8-MAY-92
SHEET	1 OF 1



Features and specifications subject to change without notice.

A Division of Peavey Electronics Corporation
 711 A Street, P. O. Box 2898, Meridian, MS 39302-2898 / (601) 483-5376 / Telex: 504115 / Fax: (601) 486-1278
 #80301689

©1993

Printed in U.S.A. 8/93